

Beck.

The differential pressure transmitter for air



Differential pressure transmitter 984



General description

The differential pressure transmitters of the 984 series are used to measure differential pressure, overpressure and vacuum. They provide up to 8 pressure ranges and 2 output signals, which are easily selectable by jumper or rotary selector switch.

Applications

Monitoring of gaseous, non-combustible and non-aggressive media.

Possible usage areas are:

- Building automation and air conditioning systems
- Overpressure measurement in clean rooms and laboratories
- Measurement of constant pressure in VAV applications
- Dynamic filter and ventilator monitoring

Configurable pressure range

For an optimum adaptation to the application, the transmitter can be switched between various pressure ranges. The factory setting is the most sensitive range. For the series 984M and 984A the less sensitive second range will be selected by simply removing a jumper. For the series 984Q the available eight ranges can be selected by a rotary selector switch.

Output signal selection

The output signal of the 3-wire version can be changed between 0 ... 10 Volt and 4 ... 20 mA by removing a jumper. The series 984M is also available in a 2-wire version with 4 ... 20 mA output signal.

Configurable response time

The response time of the output signal can be configured using a jumper. If the jumper is in place the response time is slow (factory setting), which is useful for suppressing brief pressure peaks. If the application requires a fast response time the jumper must be removed.

Easy offset calibration

The output signal of the 984M series can be calibrated to zero by pressing the M push-button in a pressureless state of the transmitter. The series 984A and 984Q perform an automated zero offset compensation.

Volume flow measurement (optional)

The shape of the output signal can be switched from linear to square root using a jumper in order to measure the volume flow via a differential pressure.

Switching output (optional, not available with 2-wire version)

To give a switch signal at an user defined pressure level the transmitter has an adjustable transistor switching output (NPN NO) with a maximum switching capacity of 30 VDC/100 mA.

Display (optional, not available with 2-wire version)

In addition to the analogue output signal the pressure value can be read out on a red LED-display in Pascal or other pressure units.

Measuring method

Piezoresistive pressure transducer

Mounting position

Can be mounted in any position. The zero offset calibration eliminates any possible position error.

Overview on technical data

Series	984M	984M	984A	984Q
Electrical connection	2-wire	3-wire	3-wire	3-wire
Measuring method	Piezoresistive pressure transducer			
Supply voltage	18...30 VDC	18...30 VAC / VDC 50 – 60 Hz	18...30 VAC / VDC 50 – 60 Hz	18...30 VAC / VDC 50 – 60 Hz
Output signal selectable	–	with jumper	with jumper	with jumper
Output signal 0 ... 10 V	–	■	■	■
Output signal 4 ... 20 mA	■	■	■	■
Output signal 0 ... 5 V	–	□	□	□
Output signal 0 ... 20 mA	–	□	□	□
LED display, red, 4 digits	–	□	□	□
Switching output for max 30 VDC / 100 mA	–	□	□	□
Output signal selection from linear to square root	■	■	■	■
Max. current draw without display VDC / VAC	21 / – mA	50 / 140 mA	60 / 150 mA	60 / 150 mA
Max. current draw with display VDC / VAC	– / –	70 / 180 mA	80 / 190 mA	80 / 190 mA
Load for 4 ... 20 mA output	20 ... 500 Ω			
Load for 0 ... 10 V output	–	≥ 1kΩ (≤ 10 mA)	≥ 1kΩ (≤ 10 mA)	≥ 1kΩ (≤ 10 mA)
Pressure medium	Air, non-combustible and non-aggressive gases			
Configuration of pressure range	with jumper	with jumper	with jumper	with rotary switch
Max. number of pressure range	2	2	2	8
Only one customized pressure range	□	□	□	□
Manuel offset compensation	■	■	–	–
Automated offset compensation	–	–	■	■
Working and storage temperature	-20 ... +70°C	-20 ... +70°C	-10 ... +50°C	-10 ... +50°C
Linearity (incl. hysteresis and repeatability)	≤ ±0.5% FS, min. ±1 Pa			
Uncertainty (Total Error Band w/o long-term and temperature effects)	±1% FS, min. ±1 Pa			
Long-term stability	≤ ±1% FS	≤ ±1% FS	n.r.	n.r.
Humidity	0 ... 95% rel., non-condensing			
Response time 0.2 s and 1 s (standard)	■	■	■	■
Response time free selectable between 0.2 s and 20 s	□	□	□	□
Process connection P1 and P2	Hose connection with 6 mm outer diameter			
Electrical connection	Screw terminal block for wires and strands up to 1.5 mm²			
Mounting	Screw mounting with serrated screws			
Housing material	Housing with process connection P2 (–) made from ABS Base part with process connection P1 (+) made from POM			
Housing dimensions	approx. Ø 85 x 58 mm			
Weight	approx. 120 gr	approx. 135 gr	approx. 150 gr	approx. 150 gr
Protection class acc. to EN 60529	IP54 with protection cap or IP00 without protection cap			
CE Conformance acc. to EN 61326	■	■	■	■
RoHS Conformance acc. to 2011/65/EU	■	■	■	■

Accuracy specifications according to EN 60770 based on the pressure measurement at 23 °C

■ standard equipment

□ optional equipment

Differential pressure transmitter 984M

with manual offset compensation and 2 pressure ranges

Pressure ranges

Model	Range 1	Range 2	Overload capacity	Bursting pressure	Additional uncertainty with temperature [% FS/10K]
984M.3X3	-50 ... 0 ... +50 Pa	-	60 kPa	100 kPa	± 1.0
984M.3W3	-100 ... 0 ... +100 Pa	-	60 kPa	100 kPa	± 0.7
984M.3Q3	-500 ... 0 ... +500 Pa	-	75 kPa	125 kPa	± 0.3
984M.3S3	-1000 ... 0 ... +1000 Pa	-	75 kPa	125 kPa	± 0.3
984M.323	0 ... 100 Pa	0 ... 250 Pa	60 kPa	100 kPa	± 0.7
984M.333	0 ... 250 Pa	0 ... 500 Pa	60 kPa	100 kPa	± 0.5
984M.343	0 ... 500 Pa	0 ... 1000 Pa	75 kPa	125 kPa	± 0.3
984M.353	0 ... 1 kPa	0 ... 2.5 kPa	85 kPa	135 kPa	± 0.3
984M.373	0 ... 5 kPa	0 ... 10 kPa	85 kPa	135 kPa	± 0.3
984M.393	0 ... 25 kPa	0 ... 50 kPa	200 kPa	400 kPa	± 0.3
984M.3A3	0 ... 50 kPa	0 ... 100 kPa	200 kPa	400 kPa	± 0.3

Further pressure ranges on request.

Order matrix


Order matrix		984M.									
Version	Standard UL certified	U									
IP protection class	IP 54 with cable conduit M20x1.5 IP 54 with cap nut conduit AF20	3 5									
Configurable pressure range	- 50 ... 0 ... +50 Pa (-0.5 ... 0 ... +0.5 mbar)		X								
	- 100 ... 0 ... +100 Pa (-1.0 ... 0 ... +1.0 mbar)		W								
	- 500 ... 0 ... +500 Pa (-5.0 ... 0 ... +5.0 mbar)		Q								
	- 1000 ... 0 ... +1000 Pa (-10 ... 0 ... +10 mbar)		S								
	0 ... 100 Pa (1.0 mbar)		2								
	0 ... 250 Pa (2.5 mbar)		3								
	0 ... 500 Pa (5.0 mbar)		4								
	0 ... 1 kPa (10 mbar)		5								
	0 ... 5 kPa (50 mbar)		7								
	0 ... 25 kPa (250 mbar)		9								
0 ... 50 kPa (500 mbar)		A									
Pressure unit	mbar			1							
	inWC			2							
	Pa			3							
	mmWC			4							
Output signal and supply voltage	0 ... 10 V or 4 ... 20 mA, 3-wire, with switching output					1					
	0 ... 10 V or 4 ... 20 mA, 3-wire, without switching output					7					
	4 ... 20 mA or 0 ... 10 V, 3-wire, with switching output					3					
	4 ... 20 mA or 0 ... 10 V, 3-wire, without switching output					D					
4 ... 20 mA, 2-wire					2						
Display	no display							0			
	with LED-display (only for 3-wire)							1			
Electrical connection	via screw terminal block									4b	
Accessories*	without accessories										
	with Climaset® 6555										4
	with Climaset® 6550										5

*see optional accessories for other versions


Factory settings printed in bold type.

Terminal assignments


3-wire with switching output




3-wire without switching output



2-wire



Screw terminal block 4-pole



4	Switching output (SO)
3	Ground (GND)
2	Output signal (0...10 V / 4...20 mA)
1	Supply voltage (18...30 VAC / VDC)

4	Not used
3	Ground (GND)
2	Output signal (0...10 V / 4...20 mA)
1	Supply voltage (18...30 VAC / VDC)

2	Output signal (4...20 mA)
1	Supply voltage (18...30 VDC)

Differential pressure transmitter 984A

with automated offset compensation and 2 pressure ranges

Pressure ranges

Model	Range 1	Range 2	Overload capacity	Bursting pressure	Additional uncertainty with temperature [% FS/10K]
984A.3E3	-25 ... 0 ... +25 Pa	-	60 kPa	100 kPa	± 0.7
984A.3X3	-50 ... 0 ... +50 Pa	-	60 kPa	100 kPa	± 0.5
984A.3W3	-100 ... 0 ... +100 Pa	-	75 kPa	125 kPa	± 0.3
984A.3Q3	-500 ... 0 ... +500 Pa	-	75 kPa	125 kPa	n.r.
984A.3S3	-1000 ... 0 ... +1000 Pa	-	60 kPa	100 kPa	n.r.
984A.303	0 ... 25 Pa	0 ... 50 Pa	60 kPa	100 kPa	± 0.7
984A.313	0 ... 50 Pa	0 ... 100 Pa	60 kPa	100 kPa	± 0.5
984A.323	0 ... 100 Pa	0 ... 250 Pa	60 kPa	100 kPa	± 0.3
984A.333	0 ... 250 Pa	0 ... 500 Pa	60 kPa	100 kPa	n.r.
984A.343	0 ... 500 Pa	0 ... 1000 Pa	75 kPa	125 kPa	n.r.
984A.353	0 ... 1 kPa	0 ... 2.5 kPa	85 kPa	135 kPa	n.r.
984A.373	0 ... 5 kPa	0 ... 10 kPa	85 kPa	135 kPa	n.r.
984A.393	0 ... 25 kPa	0 ... 50 kPa	200 kPa	400 kPa	n.r.

Weitere Druckmessbereiche auf Anfrage.

Order matrix



		984A.									
Version	Standard	U									
IP protection class	UL certified										
	IP 54 with cable conduit M20x1.5	3									
Configurable pressure range	IP 54 with cap nut conduit AF20	5									
	- 25 ... 0 ... +25 Pa		E								
	(-0.25 ... 0 ... +0.25 mbar)		X								
	- 50 ... 0 ... +50 Pa		W								
	(-0.5 ... 0 ... +0.5 mbar)		Q								
	- 100 ... 0 ... +100 Pa		S								
	(-1.0 ... 0 ... +1.0 mbar)		0								
	- 500 ... 0 ... +500 Pa		1								
	(-5.0 ... 0 ... +5.0 mbar)		2								
	- 100 ... 0 ... +100 Pa		3								
	(-10 ... 0 ... +10 mbar)		4								
	0 ... 25 Pa (0.25 mbar)	0 ... 50 Pa (0.5 mbar)	5								
	0 ... 50 Pa (0.5 mbar)	0 ... 100 Pa (1.0 mbar)	7								
	0 ... 100 Pa (1.0 mbar)	0 ... 250 Pa (2.5 mbar)	9								
Pressure unit	0 ... 250 Pa (2.5 mbar)	0 ... 500 Pa (5.0 mbar)									
	0 ... 500 Pa (5.0 mbar)	0 ... 1000 Pa (10 mbar)									
	0 ... 1 kPa (10 mbar)	0 ... 2.5 kPa (25 mbar)									
	0 ... 5 kPa (50 mbar)	0 ... 10 kPa (100 mbar)									
	0 ... 25 kPa (250 mbar)	0 ... 50 kPa (500 mbar)									
Output signal and supply voltage	mbar										
	inWC										
	Pa										
	mmWC										
Display	0 ... 10 V or 4 ... 20 mA, 3-wire, with switching output										
	0 ... 10 V or 4 ... 20 mA, 3-wire, without switching output										
	4 ... 20 mA or 0 ... 10 V, 3-wire, with switching output										
	4 ... 20 mA or 0 ... 10 V, 3-wire, without switching output										
Electrical connection	no display										
	with LED-display										
Accessories*	via screw terminal block										
	without accessories										
Factory settings	with Climaset® 6555										
	with Climaset® 6550										

*see optional accessories for other versions

Factory settings printed in bold type.


Terminal assignments

3-wire with switching output



4	Switching output (SO)
3	Ground (GND)
2	Output signal (0...10 V / 4...20 mA)
1	Supply voltage (18...30 VAC / VDC)

3-wire without switching output



4	Not used
3	Ground (GND)
2	Output signal (0...10 V / 4...20 mA)
1	Supply voltage (18...30 VAC / VDC)

Differential pressure transmitter 984Q

with automated offset compensation and 8 pressure ranges

Pressure ranges

Model	Position rotary switch	Pressure range	Overload capacity	Bursting pressure	Additional uncertainty with temperature [% FS/10K]
984Q.343	1	0 ... 100 Pa	75 kPa	125 kPa	± 0.7
	2	0 ... 250 Pa	75 kPa	125 kPa	± 0.3
	3	0 ... 500 Pa	75 kPa	125 kPa	n.r.
	4	0 ... 1000 Pa	75 kPa	125 kPa	n.r.
	5	-50 ... 0 ... +50 Pa	75 kPa	125 kPa	± 0.7
	6	-100 ... 0 ... +100 Pa	75 kPa	125 kPa	± 0.5
	7	-250 ... 0 ... +250 Pa	75 kPa	125 kPa	n.r.
	8	-500 ... 0 ... +500 Pa	75 kPa	125 kPa	n.r.
	0	fixed output signal 0 V / 4 mA	-	-	-
	9	fixed output signal 10 V / 20 mA	-	-	-
984Q.353	1	-100 ... 0 ... +100 Pa	85 kPa	125 kPa	± 1.0
	2	0 ... 100 Pa	85 kPa	125 kPa	± 1.5
	3	0 ... 200 Pa	85 kPa	125 kPa	± 1.0
	4	0 ... 500 Pa	85 kPa	125 kPa	± 0.5
	5	0 ... 1000 Pa	85 kPa	125 kPa	± 0.3
	6	0 ... 1500 Pa	85 kPa	125 kPa	n.r.
	7	0 ... 2000 Pa	85 kPa	125 kPa	n.r.
	8	0 ... 2500 Pa	85 kPa	125 kPa	n.r.
	0	fixed output signal 0 V / 4 mA	-	-	-
	9	fixed output signal 10 V / 20 mA	-	-	-

Further pressure ranges on request.


Order matrix

		984Q.							
Version	Standard UL certified	U							
IP protection class	IP 54 with cable conduit M20x1.5 IP 54 with cap nut conduit AF20	3 5							
Configurable pressure range	see pressure ranges max. 1000 Pa (10 mbar) max. 2500 Pa (25 mbar)		4 5						
Pressure unit	mbar inWC Pa mmWC			1 2 3 4					
Output signal and supply voltage	0 ... 10 V or 4 ... 20 mA , 3-wire, with switching output 0 ... 10 V or 4 ... 20 mA , 3-wire, without switching output 4 ... 20 mA or 0 ... 10 V , 3-wire, with switching output 4 ... 20 mA or 0 ... 10 V , 3-wire, without switching output				1 7 3 D				
Display	no display with LED-display					0 1			
Electrical connection	via screw terminal block							4b	
Accessories*	without accessories with Climaset® 6555 with Climaset® 6550								4 5


*see optional accessories for other versions
Factory settings printed in bold type.

Terminal assignments

3-wire with switching output




Screw terminal block 4-pole



4	Switching output (SO)
3	Ground (GND)
2	Output signal (0...10 V / 4...20 mA)
1	Supply voltage (18...30 VAC / VDC)


3-wire without switching output




4	Not used
3	Ground (GND)
2	Output signal (0...10 V / 4...20 mA)
1	Supply voltage (18...30 VAC / VDC)

Dimensional Drawings


984 with cap nut conduit AF20

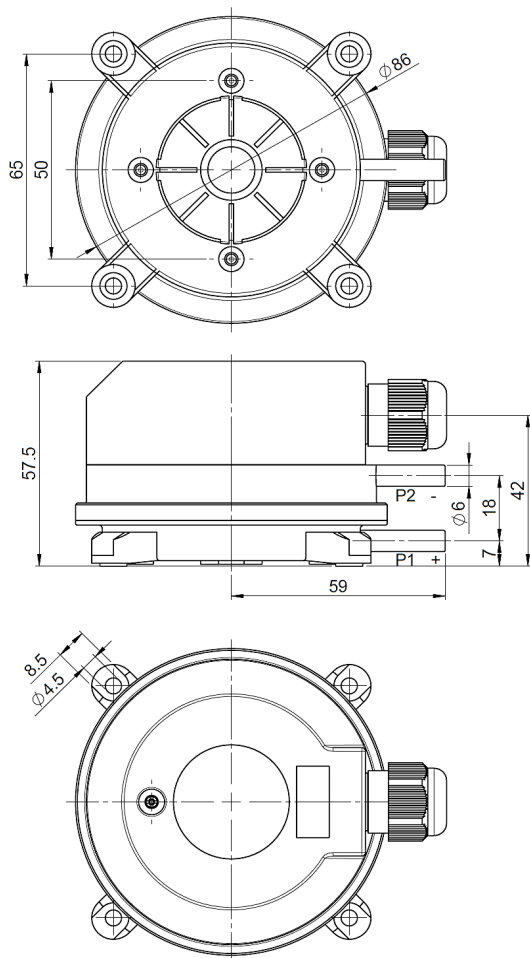


Mounting bracket 6481

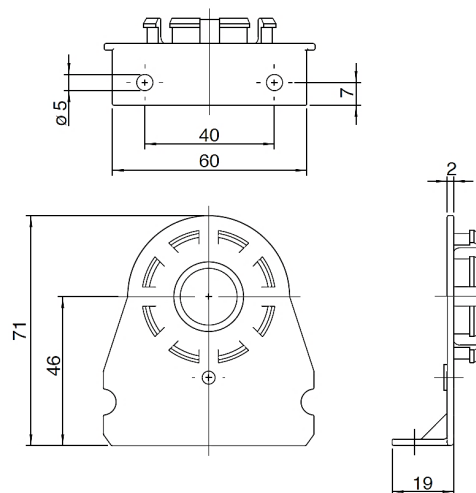


Mounting bracket 6482

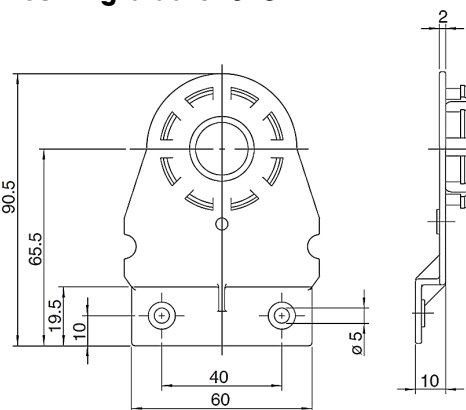


Duct connection for Climaset® 6550/6556




Duct connection for Climaset® 6555/6557

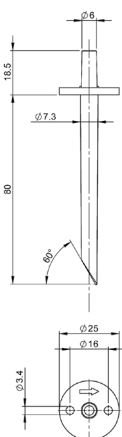

Mounting bracket 6401

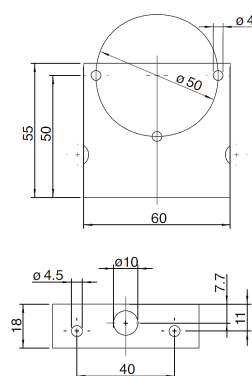


Mounting bracket 6402

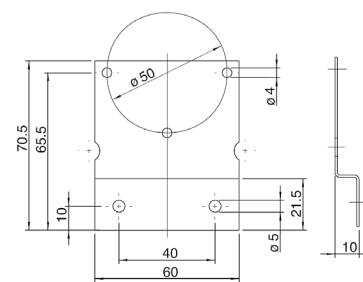


Analog output signal

Linear (Jumper 3 plugged in)

0 – 10 V

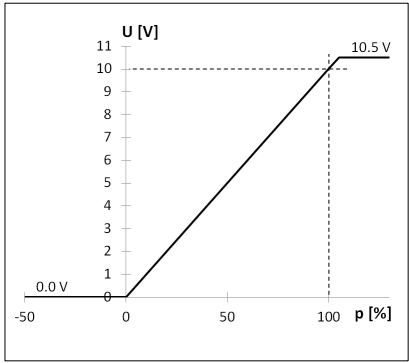


4 – 20 mA

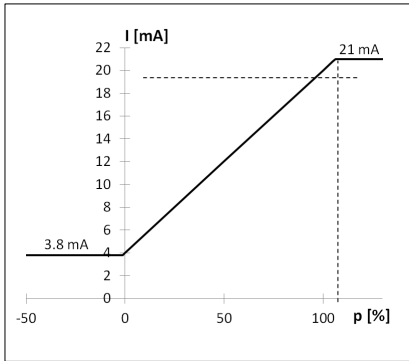


Square root (Jumper 3 open)

0 – 10 V

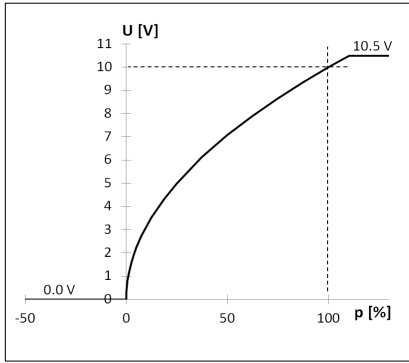

4 – 20 mA

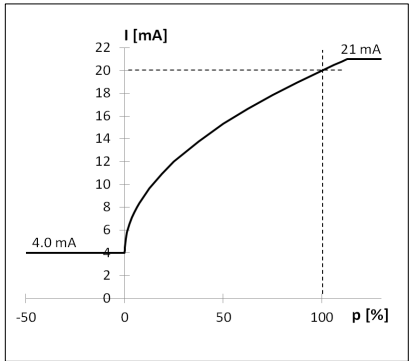

Optional Accessories

Metal mounting bracket S-shaped	Article No. 6402
Metal mounting bracket L-shaped	Article No. 6401
Snap-on plastic bracket S-shaped	Article No. 6482
Snap-on plastic bracket L-shaped	Article No. 6481
Universal bracket set made of stainless steel	Article No. 6596
Climaset® consisting of 2m PVC hose and 2 plastic pipes	Article No. 6555
Climaset® consisting of 2m Silicone hose and 2 plastic pipes	Article No. 6557
Climaset® consisting of 2m PVC hose and 2 angled metal pipes	Article No. 6550
Climaset® consisting of 2m Silicone hose and 2 angled metal pipes	Article No. 6556
Roll with 100 m PVC hose	Article No. 6424
Roll with 100 m Silicone hose	Article No. 6425
Inspection certificate 3.1 DIN EN 10204:2004	Article No. 6905



CONFORMS TO UL STD.
61010-1
Certified to CSA STD.
C22.2 No. 61010-1

Intertek
3192203



Beck Sensortechnik GmbH
Ferdinand-Steinbeis-Str. 4
P.O. Box 1131
71144 Steinenbronn
Telephone: +49 (7157) 5287-0
Telefax: +49 (7157) 5287-83
E-Mail: sales@beck-sensors.com
<http://www.beck-sensors.com>